

I.W.T. 規格 E型リング (軸用) I.W.T. Standard External Ring E-type



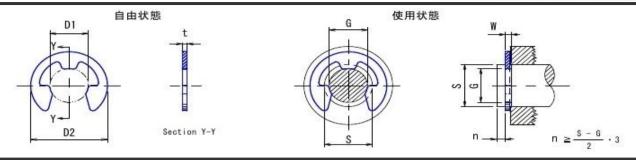

単位 mm

呼 び ^{Ring} No.	軸 径 Shaft dia		リ ン グ 寸 法 JIS RING DIMENSIONS					溝 寸 法 GROOVE DIMENSIONS			
	s		内 径 Inside dia		外 径 Outside dia			清 径 Groove dia		溝 巾 Groove width	
	以上	未満	D1	公 差	D2	t	公差	G	公差	w	公 差
E - 001 💥	0.8	1.0	0.60	+0.02 -0.01	1.3	0.2	±0.02	0.63	+0.03 -0	0.25	+0.05 -0
E - 002 🔆	1.0	1.2	0.60		1.5	0.2		0.63		0.25	
E - 003 🔆	1.0	1.2	0.65		1.8	0.2		0.7		0.25	
E-07 💥	1.0	1.2	0.65	+0.04 -0.07	2.0	0.2	±0.03	0.7	+0.05 -0	0.25	
E - 10 💥	1.3	1.7	0.95		2.8	0.2		1.0		0.25	
E - 13 💥	1.6	2.1	1.25	+0.05 -0.07 +0.07 -0.10	3.3	0.3		1.3		0.35	
E - 17 💥	2.0	2.6	1.65		4.2	0.4		1.7		0.45	
E - 20 💥	2.4	3.0	1.95		4.6	0.5		2.0		0.55	
E - 24 💥	2.9	3.8	2.35		6.0	0.6	±0.04	2.4		0.68	+0.07 -0
E - 28 💥	3.3	4.2	2.74		6.5	0.6		2.8		0.68	
E - 32 💥	3.8	4.7	3.14		7.2	0.6		3.2		0.68	
E - 37 💥	4.3	5.3	3.64		8.0	0.7		3.7		0.78	
E - 40 💥	4.8	6.3	3.93		10.0	0.7		4.0		0.78	
E - 42 💥	5.0	6.4	4.13		10.0	0.7		4.2		0.78	
E - 50 💥	5.8	7.3	4.93		11.0	0.7		5.0		0.78	
E - 58 💥	6.6	8.2	5.73		12.0	0.7		5.8		0.78	
E-60 💥	6.9	8.6	5.93		12.7	0.9	±0.05	6.0	+0.07 -0	1.00	+0.08 -0
E − 64 💥	7.3	9.1	6.32		13.5	0.9		6.4		1.00	
E - 74	8.4	10.3	7.31		15.0	0.9		7.4		1.00	
E - 80	9.2	11.3	7.91		16.5	1.0		8.0		1.10	
E - 85	9.6	12.0	8.40		17.0	1.0		8.5		1.10	
(E - 98)	11.0	13.3	9.69	+0.08 -0.10	19.0	1.1		9.8		1.25	
(E - 100)	11.3	13.8	9.88		19.5	1.1		10.0		1.25	
E - 110	12.4	15.2	10.88		22.0	1.2		11.0		1.35	
E - 120	13.5	16.5	11.87	+0.08 -0.12	24.0	1.3		12.0		1.45	
E - 140	14.8	19.3	13.86		28.0	1.3		14.0		1.45	
E - 160	18.0	22.0	15.85.		32.0	1.3		16.0		1.45	
(E - 180)	20.3	24.8	17.84		36.0	1.5		18.0		1.65	
(E - 210)	23.7	29.0	20.83		42.0	1.5		21.0		1.65	

標準材質は、SK85M叉はSK85(黒染め)、ステンレス(SUS304)です。 その他は受注生産となります。

- (注) E-001~003は、SK製品のお取り扱いございません。
- (注) ()は、ステレンレス製品のお取扱いございません。
- (注) ※印は、リングパック品もお取扱いございます。